



P/No.: MFL66101126

R32 / 50Hz



General Information Product Data Design and installation



General Information

1.Model Line Up 2.Nomenclature

1. Model line up

♦ Model line up

Category	Capacity (kW)	Chassis	Model Name
	5.5		ZHBW056A1 [HM051MR U44]
	7.0	Chassis UN36A UN60A	ZHBW076A1 [HM071MR U44]
1 Phase Model	9.0		ZHBW096A1 [HM091MR U44]
1 Ø, 220-240 V, 50 Hz	12.0		ZHBW126A1 [HM121MR U34]
	14.0	1	ZHBW146A1 [HM141MR U34]
	16.0		ZHBW166A1 [HM161MR U34]
2 Dhasa Madal	5.5 7.0 9.0 12.0 14.0	UNOUA	ZHBW128A1 [HM123MR U34]
3 Phase Model 3 Ø, 380-415 V, 50 Hz	14.0	UN36A ZHE ZHE ZHE ZHE ZHE ZHE ZHE ZHE ZHE	ZHBW148A1 [HM143MR U34]
0,000 +10 0,00112	16.0		ZHBW168A1 [HM163MR U34]

♦ External appearance

UN36A	UN60A		
EG Frierma V.			

2. Nomenclature

Factory Model Name

Model Name	ZH	В	w	12	6	Α	1
No.	1	2	3	4	5	6	7

No.	Signification
1	ZH : Air-to-Water Heat Pump for R32
2	Classification
	B : Monobloc
3	Model Type
C C	W : Inverter Heat Pump
4	Heating Capacity (kW)
7	Ex) 5 kW : '05', 16 kW : '16'
	Electrical ratings
5	6 : 1 Ø, 220-240 V, 50 Hz 8 : 3 Ø, 380-415 V, 50 Hz
0	Function
6	A : General Heating Heat pump
7	Series

2. Nomenclature

Buyer Model Name

Model Name	Н	М	12	1	М	R	U3	4
No.	1	2	3	4	5	6	7	8

No.	Signification
1	H : Air-to-Water Heat Pump
2	Classification
	M : Monobloc type
3	Heating Capacity (kW)
	Ex) 5 kW : '05', 16 kW : '16'
	Electrical ratings
4	1 : 1 Ø, 220-240 V, 50 Hz 3 : 3 Ø, 380-415 V, 50 Hz
5	Leaving Water Combination
Ŭ	M : Mid Temperature
	Type of refrigerant
6	A : R410A R : R32
	Platform (Chassis code)
7	U3 : UN60A Chassis U4 : UN36A Chassis
8	Series



Product Data

- **1.List of Functions**
- 2. Specification
- 3. Dimensions
- **4. Piping Diagrams**
- **5.Wiring Diagrams**
- 6.Performance Data
- **7.Electric Characteristics**
- 8. Operation Range
- 9.Sound levels
- **10.Hydraulic Performance**

1. List of Functions

Basic functions of Unit

Water Side

Category	Functions	ZHBW056A1 [HM051MR U44] ZHBW076A1 [HM071MR U44] ZHBW096A1 [HM091MR U44] ZHBW126A1 [HM121MR U34] ZHBW146A1 [HM141MR U34] ZHBW166A1 [HM161MR U34] ZHBW128A1 [HM123MR U34] ZHBW148A1 [HM143MR U34] ZHBW168A1 [HM163MR U34]
Installation	Backup heater (Install kit)	O (Accessory)
Reliability	Self diagnosis	0
,	Auto Restart	0
	Child lock	0
Convenience	Sleep mode	0
Convenience	Timer (on/off)	0
	Timer (weekly)	0
	Two thermistor control	Х
Network function	Network solution(LGAP)	0
Network function	Modbus connectivity (without gateway)	0
	Anti-condensation on floor (cooling)	0
	Digital output for external pump	0
	Current flow rate monitoring	0
	Thermostat interface (230V AC)	0
	Thermostat interface (24V AC)	Х
	Solar thermal system*	O (Accessory)
	DHW(Domestic Hot Water) tank installation kit	O (Accessory)
	PHEX anti-freezing control	0
	Water pump anti-stuck function	0
	Weather compensation for heating and cooling (Auto mode)	0
	Low noise operation	0
	Anti-overheating of water pipe	0
Air to Water Heat Pump Functions	Emergency operation	0
Pump Functions	Weather Dependent Operation with Thermostat	0
	Scheduler (DHW Tank Heater)	0
	Timer (Domestic Hot Water Tank Heater)	0
	Quick Domestic Hot Water Tank Heating	0
	Screed Drying Mode	0
	Sump Heater	0
	Base Pan Heater	0
	Integrated Dry Contact (CN-EXT)	0
	Water flow control	0
	Water pressure monitoring	0
	Digital input for energy saving (ESS)	0
	Energy Monitoring	0
	DHW Recirculation	0

Note

O : Applied, X : Not applied Accessory : Ordered and purchased separately the accessory package referring to the model name provided and install at field. Accessory line-ups varies by region, so check your local catalogue or local sales material.
 * : This function requires the 3rd party accessory, PT-1000 sensor. (field supply)

♦ Refrigerant Side

Category	Functions	ZHBW056A1 [HM051MR U44] ZHBW076A1 [HM071MR U44] ZHBW096A1 [HM091MR U44] ZHBW126A1 [HM121MR U34] ZHBW146A1 [HM141MR U34] ZHBW166A1 [HM161MR U34]	ZHBW128A1 [HM123MR U34] ZHBW148A1 [HM143MR U34] ZHBW168A1 [HM163MR U34]	
	Defrost / Deicing	0	0	
	High pressure switch	0	0	
	Low pressure switch	Х	Х	
Reliability	Phase protection	Х	0	
	Restart delay (3-minutes)	0	0	
	Self diagnosis	0	0	
	Soft start	Х	Х	
	Test function	Х	Х	
	Low Noise Operation	0	0	
	Wiring Error Check	Х	Х	
Convenience	Peak Control	0	0	
Convenience	Mode Lock	0	0	
	Forced Cooling Operation (Outdoor Unit)	Х	Х	
	Base Pan Heater	0	0	
	SLC(Smart Load Control)	Х	Х	
Network function	Network solution(LGAP)	0	0	

Note

O : Applied, X : Not applied Accessory : Ordered and purchased separately the accessory package referring to the model name provided and install at field. Accessory line-ups varies by region, so check your local catalogue or local sales material.
 * : This function requires the 3rd party accessory, PT-1000 sensor. (field supply)

1. List of Functions

Accessory Compatibility List

	Category	Product	Remark	ZHBW056A1 [HM051MR U44] ZHBW076A1 [HM071MR U44] ZHBW096A1 [HM091MR U44] ZHBW126A1 [HM121MR U34] ZHBW146A1 [HM141MR U34] ZHBW166A1 [HM161MR U34] ZHBW128A1 [HM123MR U34] ZHBW148A1 [HM143MR U34] ZHBW168A1 [HM163MR U34]
Wired Remote Controller	Standard	PREMTW101	New standard (White)	0
	Simple Contact	PDRYCB000	Simple Dry Contact	0
Dry Contact		PDRYCB400	2 Points Dry Contact (For Setback)	Х
Dry Contact	Communication Type	PDRYCB320	For 3rd party Thermostat	0
		PDRYCB500	Dry Contact for Modbus	Х
	Remote temperature sensor	PQRSTA0	-	0
	Group control wire	PZCWRCG3	0.25 m	Х
	2-Remo Control Wire	PZCWRC2	0.25 m	0
Let a let	Extension wire	PZCWRC1	10 m	0
	Wi-Fi controller *	PWFMDD200	USB Cable : 0.6 m Extension cable : 0.5 m	0
	Meter Interface***	PENKTH000	Interface between IDU and Meter	0
	2 Zone Valve Controller	PZNVVB200	-	Х
	DHW tanks (Single coil)	OSHW-200F	200 L	0
		OSHW-300F	300 L	0
		OSHW-500F	500 L	0
	DHW tanks (Double coil)	OSHW-300FD	300 L	0
		PHLTA	For Split 1Φ	Х
	DHW tank kit	PHLTB	For Monobloc	0
		PHLTC	For Split 3Φ	X
	DHW sensor	PHRSTA0	included in DHW Tank kit	0
	Thermostatic mixing valve	OSHA-MV	3/4" DN20	0
		OSHA-MV1	1" DN25	0
		AHEH036A [HA031M E1]	220-240 V, 1Φ (For Monobloc)	0
		AHEH066A [HA061M E1]	220-240 V, 1Φ (For Monobloc)	0
		AHEH068A [HA063M E1]	380-415 V, 3Ф (For Monobloc)	0
Accessory Kit for AWHP	Backup heater	AHEH066B [HA061B E1]	220-240 V, 1Φ (For Hydrosplit HN1600MB NK0)	Х
AWHE	Dackup neater	AHEH068B [HA063B E1]	380-415 V, 3Ф (For Hydrosplit HN1600MB NK0)	Х
		AHEH066C [HA061C E1]	220-240 V, 1Ф (For Hydrosplit HN1600MC NK1)	Х
		AHEH068C [HA063C E1]	380-415 V, 3Φ (For Hydrosplit HN1600MC NK1)	Х
	3way valve	OSHA-3V	-	0
	Solar thermal kit	PHLLA	-	Х
	2nd Circuit or E/Heater Thermistor	PRSTAT5K10	-	0
	Drain pan	PHDPB	-	X
	-	PHDPC	-	Х
	Cover plate	PDC-HK10	For K1 Chassis only	X
	Buffer Tank (40ℓ)	OSHB-40KT	For IWT(integrable)	X
Note	DHW expansion vessel (8ℓ)	OSHE-12KT	For IWT(integrable)	Х

Note

O: Possible, X: Impossible, - : Not applicable
 *: Some advanced functions controlled by individual controller cannot be operated.
 **: ACP or AC Smart is needed.
 *** Meter interface cannot be connected at the same time with 3rd-party controller.
 If you need more detail, please refer to the manual of product. (http://partner.lge.com/global : Home> Doc.Library> Product > Control(BECON))

1. List of Functions

Category		Product	Remark	ZHBW056A1 [HM051MR U44] ZHBW076A1 [HM071MR U44] ZHBW076A1 [HM091MR U44] ZHBW126A1 [HM121MR U34] ZHBW126A1 [HM141MR U34] ZHBW166A1 [HM161MR U34] ZHBW168A1 [HM123MR U34] ZHBW168A1 [HM163MR U34]	
	AC EZ	PQCSZ250S0	AC EZ	X	
	AC Ez Touch	PACEZA000	AC Ez Touch	0	
Central Controller	AC Smart	PACS4B000	AC Smart IV	0	
		PACS5A000	AC Smart 5	0	
	ACP	PACP4B000	ACP IV	0	
		PACP5A000	ACP 5	0	
	AC Manager **	PACM4B000	AC Manager IV	0	
		PACM5A000	AC Manager 5	0	
	IDU PI485	PHNFP14A0	Without case	Х	
	IDU F1405	PSNFP14A0	With case	Х	
Cotowov	ODU PI485	PMNFP14A1	PI 485 Gateway	0	
Gateway	BACnet	PQNFB17C0	ACP BACnet	0	
	Lonworks	PLNWKB000	ACP Lonworks	0	
	Modbus	PMBUSB00A	-	0	
	PDI	PPWRDB000	PDI Standard	0	
ETC		PQNUD1S40	PDI Premium	0	
	ACS IO Module	PEXPMB000	-	Х	

 Note

 1. O: Possible, X: Impossible, - : Not applicable

 2. *: Some advanced functions controlled by individual controller cannot be operated.

 3. **: ACP or AC Smart is needed.

 4. *** Meter interface cannot be connected at the same time with 3rd-party controller.

 5. If you need more detail, please refer to the manual of product. (http://partner.lge.com/global : Home> Doc.Library> Product > Control(BECON))

■ 1 phase Inverter (5.5 ~ 9 kW)

	Nominal Capa	acity and Non	ninal Input				
-	-	Outdoor Temp. (°C) DB / WB	Leaving Water Temp. (°C)	-	ZHBW056A1 [HM051MR U44]	ZHBW076A1 [HM071MR U44]	ZHBW096A1 [HM091MR U44]
	Cooling	35 / 24	18	kW	5.50	7.00	9.00
	Cooling	55724	7	kW	5.50	7.00	9.00
Capacity		7/6	35	kW	5.50	7.00	9.00
	Heating	770	55	kW	5.50	5.50	5.50
		2 / 1	35	kW	4.40	5.60	6.80
	Cooling	35 / 24	18	kW	1.17	1.56	2.14
	Cooling		7	kW	1.67	2.19	2.90
Power Input	Heating	7/6	35	kW	1.17	1.49	1.96
			55	kW	2.04	2.04	2.04
		2 / 1	35	kW	1.22	1.58	1.94
EER	Cooling	35 / 24	18	W/W	4.70	4.50	4.20
LEK	Cooling		7	W/W	3.30	3.20	3.10
		= / 0	35	W/W	4.70	4.70	4.60
COP	Heating	7/6	55	W/W	2.70	2.70	2.70
		2 / 1	35	W/W	3.60	3.55	3.50
SCOP (Low tem	p. Average Cli	mate)*			4.46	4.48	4.55
SCOP (Medium	temp. Average	e Climate)*			3.20	3.20	3.20
Rated Water Flo	w Rate (at LW	/T 35 °C)		LPM	15.8	20.1	25.9

Elect	rical Specifications	ZHBW056A1 [HM051MR U44]	ZHBW076A1 [HM071MR U44]	ZHBW096A1 [HM091MR U44]	
Power Supply	V, Ø, Hz	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	
Peak Control Running Curre	A	13.0	14.0	15.0	
Deted Dunning Current	Cooling	A	5.2	6.9	9.5
Rated Running Current	Heating	A	5.2	6.6	8.7
Circuit breaker		A	16	20	25
Wiring Connections	Power Supply Cable (included Earth, H07RN-F)	mm² x cores	4.0 x 3C	4.0 x 3C	4.0 x 3C

Тес	Technical Specifications				ZHBW076A1 [HM071MR U44]	ZHBW096A1 [HM091MR U44]
		Day Max.	dB(A)	63	64	64
Sound Power Level	Heating	Rated	dB(A)	57	57	57
		Low noise	dB(A)	54	55	55
Dimensions	Unit	W×H×D	mm	1,239 × 834 × 330	1,239 × 834 × 330	1,239 × 834 × 330
Dimensions	Packed Unit	W×H×D	mm	1,364 × 985 × 461	1,364 × 985 × 461	1,364 × 985 × 461
Maight	Unit		kg	89.0	89.0	89.0
Weight	Packed Unit	Packed Unit		100.0	100.0	100.0
Exterior	Color	Color		Warm Gray	Warm Gray	Warm Gray
	RAL Code		-	RAL 7044	RAL 7044	RAL 7044

Note

1. Due to our policy of innovation some specifications may be changed without notification.

2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

3. Sound power level is measured on the rated condition in the accordance with ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

Rated sound power level is according to the EN12102-1 under conditions of the EN14825

4. Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. For max. capacities, refer to Performance Data.

• Rated running current : Outdoor Temp. 7°CDB / 6°CWB, LWT 35 °C

5. This product contains Fluorinated greenhouse gases.

* : This values are accordance with EN14825.

Technic	al Specifications (V	Vater side)		ZHBW056A1 [HM051MR U44]]	ZHBW076A1 [HM071MR U44]	ZHBW096A1 [HM091MR U44]	
Operation Banga	Cooling	Min. ~ Max.	°C	5~27	5~27	5 ~ 27	
Operation Range (Leaving Water Temp.)	Heating	Min. ~ Max.	°C	15 ~ 65	15 ~ 65	15 ~ 65	
(Leaving water temp.)	DHW *	Min. ~ Max.	°C	15 ~ 80	15 ~ 80	15 ~ 80	
	Туре		-	Canne	d type for hot water circ	ulation	
	Model		-		UPM3K 20-75 CHBL		
Matar Dump	Motor Type		-		BLDC		
Water Pump	Steps of Pumping	Performance	-	Va	riable speed 10% to 10	0%	
	Power input	Min. / Rated	W	3 / 60	3 / 60	3 / 60	
	Water Flow Rate	Min. / Rated	ℓ/min	2.3 / 25.9	2.3 / 25.9	2.3 / 25.9	
	Туре		-		Brazed Plate HEX		
	Quantity		-	1	1	1	
Heat Exchanger	Number of Plate		EA	52	52	52	
	Water Volume		l	0.7	0.7	0.7	
	Water Flow Rate	Min. / Rated	ℓ/min	13 ~ 70	13 ~ 70	13 ~ 70	
	Volume	Max.	l	8	8	8	
Expansion Vessel		Max.	bar	3	3	3	
	Water pressure	Pre-charged	bar	1	1	1	
	Model			SIKA VVXC9SNBUC00252P		2P	
Flow Sensor	Measuring range	Min. ~ Max.	ℓ/min	5~80	5~80	5~80	
	Flow (Trigger point)	Min.	ℓ/min	7	7	7	
	Model				Sensata OFM(2HMP)		
Nater Pressure sensor	Measuring range	Min. ~ Max.	bar(G)	0~20	0~20	0~20	
	Inlet	•	inch	Male PT 1" acco	ording to ISO 7-1 (taper	ed pipe threads)	
Piping Connections	Outlet		inch		ording to ISO 7-1 (taper		
	Mesh size		-	30 mesh	30 mesh	30 mesh	
Strainer	Max. particle size		mm	0.6	0.6	0.6	
	Material		-		Stainless Steel		
Relief Valve	Pressure Limit	Upper Limit	bar	3.0	3.0	3.0	
			-	R	elief valve / Flow Sense	or	
Devices for Water Circuit			-		Drain hose		
			-	P	Pressure Sensor / Air vent		

Technic	al Specifications (F	Refrigerant sid	ZHBW056A1 [HM051MR U44]	ZHBW076A1 [HM071MR U44]	ZHBW096A1 [HM091MR U44]	
Operation Range	Cooling	Min. ~ Max.	°C DB	5 ~ 48	5 ~ 48	5~48
(Outdoor Temp.)	Heating	Min. ~ Max.	°C DB	-25 ~ 35	-25 ~ 35	-25 ~ 35
	Туре	•	-		Hermetic Sealed Scroll	•
Compressor	Model		Model × No.		RJB036MAA × 1	
Compressor	Motor Type		-		BLDC	
	Displacement		cm³/Rev.	31.6	31.6	31.6
	Туре		-	R32	R32	R32
Definement	GWP (Global Warmin	g Potential)	-	675.0	675.0	675.0
Refrigerant	Precharged Am	ount	g	1,400	1,400	1,400
	t-CO2 eq.		-	0.945	0.945	0.945
	Control		-	E	ectronic Expansion Val	ve
Refrigerant Oil	Туре		-	FW68D		
Reingerant On	Charged Volum	е	cc × No.	1,100	1,100	1,100
	Туре			Fin & Tube	Fin & Tube	Fin & Tube
	Quantity			1	1	1
Heat Exchanger		Row	EA	38	38	38
	Specification	Column	EA	2	2	2
		FPI	EA	18	18	18
Fan	Туре		-		Propeller	
	Air Flow Rate	Rated	m³/min × No.	60.0 × 1	60.0 × 1	60.0 × 1
Fan Motor	Туре		-		BLDC	
	Output		W × No.	124 × 1	124 × 1	124 × 1

Note

1. Due to our policy of innovation some specifications may be changed without notification.

2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

3. Sound power level is measured on the rated condition in the accordance with ISO 9614 standard.

Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825

 Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. For max. capacities, refer to Performance Data.

• Rated running current : Outdoor Temp. 7°CDB / 6°CWB, LWT 35 °C

5. This product contains Fluorinated greenhouse gases.

* DHW 58~80 °C Operating is available only when the booster heater is operating.

■ 1 phase Inverter (12 ~ 16 kW)

	Nominal Capa	acity and Non	ninal Input				
-	-	Outdoor Temp. (°C) DB / WB	Leaving Water Temp. (°C)	-	ZHBW126A1 [HM121MR U34]	ZHBW146A1 [HM141MR U34]	ZHBW166A1 [HM161MR U34]
	Cooling	35 / 24	18	kW	12.00	14.00	16.00
	Cooling	33724	7	kW	12.00	14.00	16.00
Capacity	Capacity	7/6	35	kW	12.00	14.00	16.00
Heating	770	55	kW	11.00	11.50	12.00	
	Ŭ	2 / 1	35	kW	11.00	12.00	13.80
O a a line a	35 / 24	18	kW	2.53	3.26	4.00	
	Cooling	33724	7	kW	3.64	4.24	5.16
Power Input		7 / 6	35	kW	2.45	2.92	3.40
	Heating		55	kW	3.79	4.04	4.29
		2 / 1	35	kW	3.01	3.31	3.83
EER	Cooling	35 / 24	18	W/W	4.75	4.30	4.00
LER	Cooling	55724	7	W/W	3.30	3.30	3.10
		7/6	35	W/W	4.90	4.80	4.70
COP	Heating	770	55	W/W	2.90	2.85	2.80
		2 / 1	35	W/W	3.65	3.63	3.60
SCOP (Low terr	np. Average Cli	mate)*			4.67	4.62	4.53
SCOP ((Medium	n temp. Averag	e Climate)*			3.47	3.46	3.45
Rated Water Flo	ow Rate (at LW	/T 35 °C)		LPM	34.5	40.3	46.0

Elec	rical Specifications	ZHBW126A1 [HM121MR U34]	ZHBW146A1 [HM141MR U34]	ZHBW166A1 [HM161MR U34]	
Power Supply	Power Supply			220-240, 1, 50	220-240, 1, 50
Peak Control Running Curre	Α	23.0	24.0	25.0	
Dated Dunning Current	Cooling	A	11.2	14.4	17.7
Rated Running Current	Heating	Α	10.9	12.9	15.1
Circuit breaker	Circuit breaker		40	40	40
Wiring Connections Power Supply Cable (included Earth, H07RN-F)		mm² x cores	6.0 x 3C	6.0 x 3C	6.0 x 3C

Tech	Technical Specifications				ZHBW146A1 [HM141MR U34]	ZHBW166A1 [HM161MR U34]
		Day Max.	dB(A)	65	66	66
Sound Power Level	Heating	Rated	dB(A)	60	61	61
		Low noise	dB(A)	56	57	57
Dimensions	Unit	W×H×D	mm	1,239 × 1,380 × 330	1,239 × 1,380 × 330	1,239 × 1,380 × 330
Dimensions	Packed Unit	W×H×D	mm	1,364 × 1,532 × 461	1,364 × 1,532 × 461	1,364 × 1,532 × 461
Moight	Unit		kg	118.6	118.6	118.6
Weight	Packed Unit	Packed Unit		133.6	133.6	133.6
Exterior	Color	Color		Warm Gray	Warm Gray	Warm Gray
	RAL Code	RAL Code		RAL 7044	RAL 7044	RAL 7044

Note

1. Due to our policy of innovation some specifications may be changed without notification.

2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

3. Sound power level is measured on the rated condition in the accordance with ISO 9614 standard.

Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825

4. Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. For max. capacities, refer to Performance Data.

• Rated running current : Outdoor Temp. 7°CDB / 6°CWB, LWT 35 $^\circ \!\!\! C$

5. This product contains Fluorinated greenhouse gases.

* : This values are accordance with EN14825.

Technic	al Specifications (V	/ater side)		ZHBW126A1 [HM121MR U34]	ZHBW146A1 [HM141MR U34]	ZHBW166A1 [HM161MR U34]	
Operation Banga	Cooling	Min. ~ Max.	°C	5~27	5~27	5~27	
Operation Range (Leaving Water Temp.)	Heating	Min. ~ Max.	°C	15 ~ 65	15 ~ 65	15 ~ 65	
(Leaving Water Temp.)	DHW *	Min. ~ Max.	°C	15 ~ 80	15 ~ 80	15 ~ 80	
	Туре	•	-	Canne	d type for hot water circ	ulation	
	Model		-	UPML 20-105 CHBL			
Matar Dump	Motor Type		-		BLDC		
Water Pump	Steps of Pumping	Performance	-	Va	riable speed 10% to 10	0%	
	Power input	Min. / Rated	W	3.5 / 140	3.5 / 140	3.5 / 140	
	Water Flow Rate	Min. / Rated	ℓ/min	5.0 / 46.0	5.0 / 46.0	5.0 / 46.0	
	Туре		-		Brazed Plate HEX		
	Quantity		-	1	1	1	
Heat Exchanger	Number of Plate		EA	76	76	76	
	Water Volume		l	1.0	1.0	1.0	
	Water Flow Rate	Min. / Rated	ℓ/min	13 ~ 70	13 ~ 70	13 ~ 70	
	Volume	Max.	l	8	8	8	
Expansion Vessel	Water pressure	Max.	bar	3	3	3	
		Pre-charged	bar	1	1	1	
	Model			SIKA VVXC9SNBUC00252P		2P	
Flow Sensor	Measuring range	Min. ~ Max.	ℓ/min	5~80	5~80	5~80	
	Flow (Trigger point)	Min.	ℓ/min	15	15	15	
Water Pressure sensor	Model	1			Sensata OFM(2HMP)		
Water Pressure sensor	Measuring range	Min. ~ Max.	bar(G)	0~20	0~20	0~20	
Dining Connections	Inlet	•	inch	Male PT 1" acco	ording to ISO 7-1 (taper	ed pipe threads)	
Piping Connections	Outlet		inch	Male PT 1" acco	ording to ISO 7-1 (taper	ed pipe threads)	
	Mesh size		-	30 mesh	30 mesh	30 mesh	
Strainer	Max. particle size		mm	0.6	0.6	0.6	
	Material		-		Stainless Steel		
Relief Valve	Pressure Limit	Upper Limit	bar	3.0	3.0	3.0	
			-	R	elief valve / Flow Sense	or	
Devices for Water Circuit			-		Drain hose		
			-	Pressure Sensor / Air vent			

Technica	al Specifications (F	Refrigerant sid	ZHBW126A1 [HM121MR U34]	ZHBW146A1 [HM141MR U34]	ZHBW166A1 [HM161MR U34]	
Operation Range	Cooling	Min. ~ Max.	°C DB	5~48	5 ~ 48	5~48
(Outdoor Temp.)	Heating	Min. ~ Max.	°C DB	-25 ~ 35	-25 ~ 35	-25 ~ 35
	Туре		-		Hermetic Sealed Scroll	
Compressor	Model		Model × No.		RJB036MAA × 1	
Compressor	Motor Type		-		BLDC	
	Displacement		cm³/Rev.	31.6	31.6	31.6
	Туре		-	R32	R32	R32
Defrivement	GWP (Global Warmin	g Potential)	-	675.0	675.0	675.0
Refrigerant	Precharged Am	ount	g	2,000	2,000	2,000
	t-CO2 eq.		-	1.350	1.350	1.350
	Control		-	E	ectronic Expansion Val	ve
Refrigerant Oil	Туре		-	FW68D		
Reingerant Oli	Charged Volum	е	cc × No.	1,100	1,100	1,100
	Туре			Fin & Tube	Fin & Tube	Fin & Tube
	Quantity			2	2	2
Heat Exchanger		Row	EA	32	32	32
	Specification	Column	EA	2	2	2
		FPI	EA	18	18	18
Fan	Туре		-		Propeller	
	Air Flow Rate	Rated	m³/min × No.	60.0 × 2	60.0 × 2	60.0 × 2
Fan Motor	Туре		-	BLDC	BLDC	BLDC
	Output		W × No.	124 × 2	124 × 2	124 × 2

Note

1. Due to our policy of innovation some specifications may be changed without notification.

2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

3. Sound power level is measured on the rated condition in the accordance with ISO 9614 standard.

Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825

 Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. For max. capacities, refer to Performance Data.

• Rated running current : Outdoor Temp. 7°CDB / 6°CWB, LWT 35 °C

5. This product contains Fluorinated greenhouse gases.

* DHW 58~80 °C Operating is available only when the booster heater is operating.

■ 3 phase Inverter (12 ~ 16 kW)

	Nominal Capa	acity and Non	ninal Input				
-	-	Outdoor Temp (°C) DB / WB	Leaving Water Temp (°C)	-	ZHBW128A1 [HM123MR U34]	ZHBW148A1 [HM143MR U34]	ZHBW168A1 [HM163MR U34]
	Cooling	ng 35 / 24	18	kW	12.00	14.00	16.00
	Cooling	35724	7	kW	12.00	14.00	16.00
Capacity Heating	7/6	35	kW	12.00	14.00	16.00	
	//0	55	kW	11.00	11.50	12.00	
		2 / 1	35	kW	11.00	12.00	13.80
	Cooling	35 / 24	18	kW	2.53	3.26	4.00
	Cooling		7	kW	3.64	4.24	5.16
Power Input		7 / 6	35	kW	2.45	2.92	3.40
	Heating		55	kW	3.79	4.04	4.29
		2 / 1	35	kW	3.01	3.31	3.83
EER	Cooling	35 / 24	18	W/W	4.75	4.30	4.00
EER	Cooling	35724	7	W/W	3.30	3.30	3.10
		7/0	35	W/W	4.90	4.80	4.70
COP	Heating	7/6	55	W/W	2.90	2.85	2.80
		2 / 1	35	W/W	3.65	3.63	3.60
SCOP (Low terr	np. Average Cli	mate)*			4.67	4.62	4.53
SCOP ((Medium	n temp. Averag	e Climate)*			3.47	3.46	3.45
Rated Water Flo	ow Rate (at LW	'T 35 ℃)		LPM	34.5	40.3	46.0

Elect	rical Specifications	ZHBW128A1 [HM123MR U34]	ZHBW148A1 [HM143MR U34]	ZHBW168A1 [HM163MR U34]	
Power Supply		V, Ø, Hz	380-415, 3, 50	380-415, 3, 50	380-415, 3, 50
Peak Control Running Curre	A	8.0	9.0	10.0	
Dated Dunning Current	Cooling	A	3.7	4.8	5.9
Rated Running Current	Heating	A	3.6	4.3	5.0
Circuit breaker	Circuit breaker		16	16	16
Wiring Connections Power Supply Cable (included Earth, H07RN-F)		mm² x cores	4.0 x 5C	4.0 x 5C	4.0 x 5C

Tech	Technical Specifications				ZHBW148A1 [HM143MR U34]	ZHBW168A1 [HM163MR U34]
		Day Max.	dB(A)	65	66	66
Sound Power Level	Heating	Rated	dB(A)	60	61	61
		Low noise	dB(A)	56	57	57
Dimensions	Unit	W×H×D	mm	1,239 × 1,380 × 330	1,239 × 1,380 × 330	1,239 × 1,380 × 330
Dimensions	Packed Unit	W×H×D	mm	1,364 × 1,532 × 461	1,364 × 1,532 × 461	1,364 × 1,532 × 461
Waight	Unit		kg	118.6	118.6	118.6
Weight	Packed Unit	Packed Unit		133.6	133.6	133.6
Exterior	Color	Color		Warm Gray	Warm Gray	Warm Gray
	RAL Code	RAL Code		RAL 7044	RAL 7044	RAL 7044

Note

1. Due to our policy of innovation some specifications may be changed without notification.

2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

3. Sound power level is measured on the rated condition in the accordance with ISO 9614 standard.

Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825

4. Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. For max. capacities, refer to Performance Data.

• Rated running current : Outdoor Temp. 7°CDB / 6°CWB, LWT 35 °C

5. This product contains Fluorinated greenhouse gases.

* : This values are accordance with EN14825.

Technic	al Specifications (V	/ater side)		ZHBW128A1 [HM123MR U34]	ZHBW148A1 [HM143MR U34]	ZHBW168A1 [HM163MR U34]	
Operation Range	Cooling	Min. ~ Max.	°C	5~27	5~27	5 ~ 27	
(Leaving Water Temp.)	Heating	Min. ~ Max.	°C	15 ~ 65	15 ~ 65	15 ~ 65	
(Leaving Water Temp.)	DHW *	Min. ~ Max.	°C	15 ~ 80	15 ~ 80	15 ~ 80	
	Туре	•	-	Canne	d type for hot water circ	ulation	
	Model		-	UPML 20-105 CHBL			
Water Pump	Motor Type		-	BLDC			
water Pump	Steps of Pumping I	Performance	-	Va	riable speed 10% to 10	0%	
	Power input	Min. / Rated	W	3.5 / 140	3.5 / 140	3.5 / 140	
	Water Flow Rate	Min. / Rated	ℓ/min	5.0 / 46.0	5.0 / 46.0	5.0 / 46.0	
	Туре	1	-		Brazed Plate HEX		
	Quantity		-	1	1	1	
Heat Exchanger	Number of Plate		EA	76	76	76	
	Water Volume		l	1.0	1.0	1.0	
	Water Flow Rate	Min. / Rated	ℓ/min	13 ~ 70	13 ~ 70	13 ~ 70	
	Volume	Max.	l	8	8	8	
Expansion Vessel		Max.	bar	3	3	3	
	Water pressure	Pre-charged	bar	1	1	1	
	Model			SIKA VVXC9SNBUC00252P			
Flow Sensor	Measuring range	Min. ~ Max.	ℓ/min	5~80	5~80	5~80	
	Flow (Trigger point)	Min.	ℓ/min	15	15	15	
Nater Pressure sensor	Model	1			Sensata OFM(2HMP)		
vater Pressure sensor	Measuring range	Min. ~ Max.	bar(G)	0~20	0~20	0~20	
Dining Connections	Inlet	•	inch	Male PT 1" acco	ording to ISO 7-1 (taper	ed pipe threads)	
Piping Connections	Outlet		inch	Male PT 1" acco	ording to ISO 7-1 (taper	ed pipe threads)	
	Mesh size		-	30 mesh	30 mesh	30 mesh	
Strainer	Max. particle size		mm	0.6	0.6	0.6	
	Material		-		Stainless Steel		
Relief Valve	Pressure Limit	Upper Limit	bar	3.0	3.0	3.0	
			-	R	elief valve / Flow Sense	or	
Devices for Water Circuit		-	Drain hose				
			-	Pressure Sensor / Air vent			

Technic	al Specifications (I	Refrigerant sid	le)	ZHBW128A1 [HM123MR U34]	ZHBW148A1 [HM143MR U34]	ZHBW168A1 [HM163MR U34]
Operation Range	Cooling	Min. ~ Max.	°C DB	5~48	5 ~ 48	5~48
(Outdoor Temp.)	Heating	Min. ~ Max.	°C DB	-25 ~ 35	-25 ~ 35	-25 ~ 35
	Туре		-		Hermetic Sealed Scroll	
Compressor	Model		Model × No.		RJB036MAA × 1	
Compressor	Motor Type		-		BLDC	
	Displacement		cm³/Rev.	31.6	31.6	31.6
	Туре		-	R32	R32	R32
Defrivement	GWP (Global Warmin	g Potential)	-	675.0	675.0	675.0
Refrigerant	Precharged Am	ount	g	2,000	2,000	2,000
	t-CO2 eq.		-	1.350	1.350	1.350
	Control		-	El	ectronic Expansion Val	ve
Refrigerant Oil	Туре		-		FW68D	
Reingerant On	Charged Volum	e	cc × No.	1,100	1,100	1,100
	Туре			Fin & Tube	Fin & Tube	Fin & Tube
	Quantity			2	2	2
Heat Exchanger		Row	EA	32	32	32
	Specification	Column	EA	2	2	2
		FPI	EA	18	18	18
Fan	Туре		-		Propeller	
	Air Flow Rate	Rated	m³/min × No.	60.0 × 2	60.0 × 2	60.0 × 2
Fan Motor	Туре		-		BLDC	
	Output		W × No.	124 × 2	124 × 2	124 × 2

Note

1. Due to our policy of innovation some specifications may be changed without notification.

2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

3. Sound power level is measured on the rated condition in the accordance with ISO 9614 standard.

Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825

 Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. For max. capacities, refer to Performance Data.

• Rated running current : Outdoor Temp. 7°CDB / 6°CWB, LWT 35 °C

5. This product contains Fluorinated greenhouse gases.

* DHW 58~80 °C Operating is available only when the booster heater is operating.

Backup Heater

	Electrical Specification		AHEH036A [HA031M E1]	AHEH066A [HA061M E1]	AHEH068A [HA063M E1]
	Туре	-	Sheath	Sheath	Sheath
	Number of Heating Coil	EA	1	2	3
	Capacity Combination	kW	3.0	3.0 + 3.0	2.0 + 2.0 + 2.0
Deakun Llaatar	Operation	-	Automatic	Automatic	Automatic
Backup Heater	Heating Steps	Step	1	2	1
	Power Supply	V, Ø, Hz	220-240, 1, 50	220-240, 1, 50	380-415, 3, 50
	Rated Running Current	А	12.5	25	8.7
	Circuit Breaker	А	25	40	25
Wiring	Power Cable (Included Earth, H07RN-F)	mm ² x cores	1.5 x 3C	4.0 x 3C	2.5 x 4C
Connections	Communication Cable (H07RN-F)	mm ² x cores	0.75 x 4C	0.75 x 4C	0.75 x 2C

Note


1. Due to our policy of innovation some specifications may be changed without notification.

2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

3. Dimensions


Product

ZHBW056A1 [HM051MR U44] / ZHBW076A1 [HM071MR U44] / ZHBW096A1 [HM091MR U44]

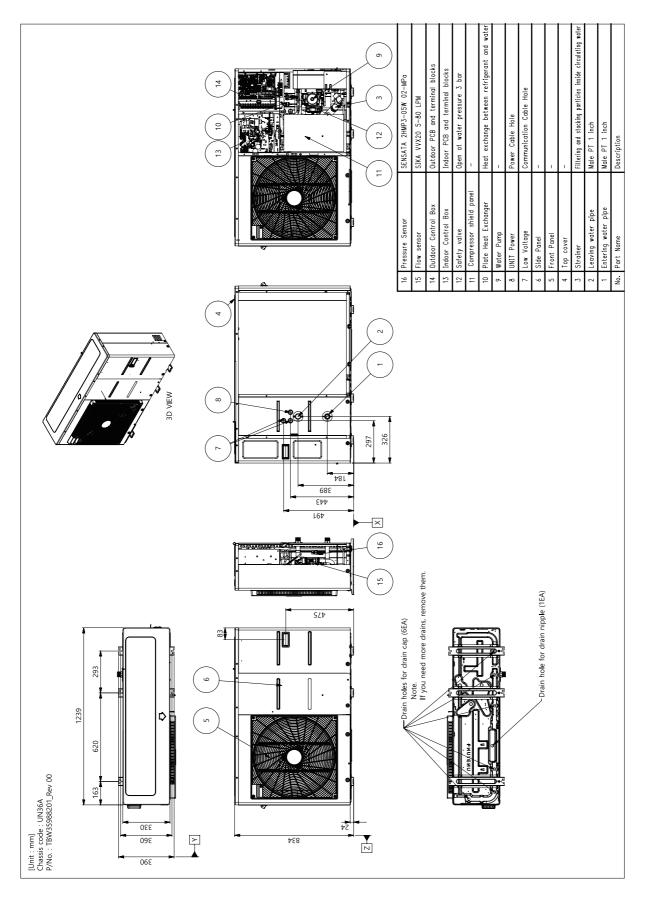


3. Dimensions

◆ ZHBW126A1 [HM121MR U34] / ZHBW146A1 [HM141MR U34] / ZHBW166A1 [HM161MR U34] ZHBW128A1 [HM123MR U34] / ZHBW148A1 [HM143MR U34] / ZHBW168A1 [HM163MR U34]

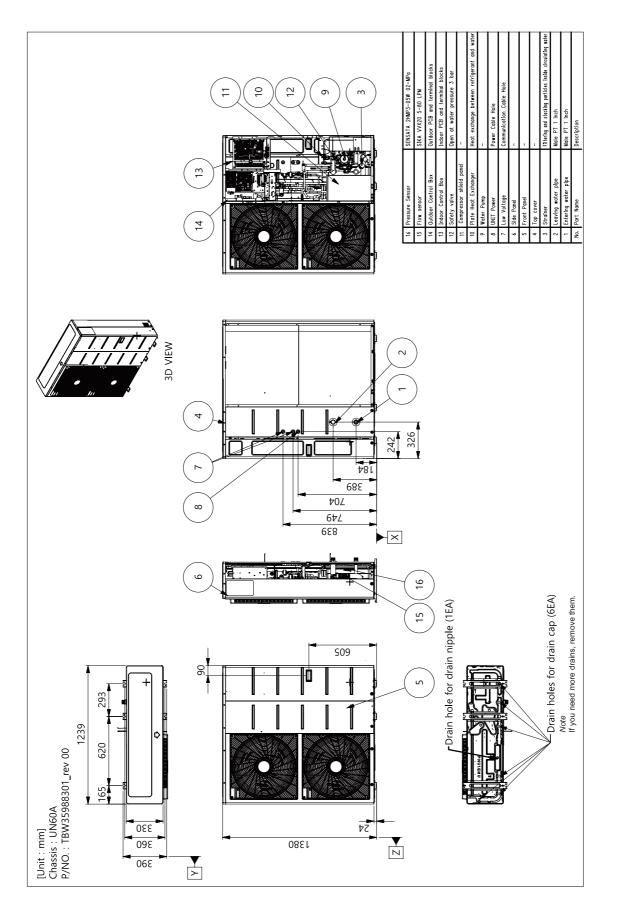


3. Dimensions

Backup Heater

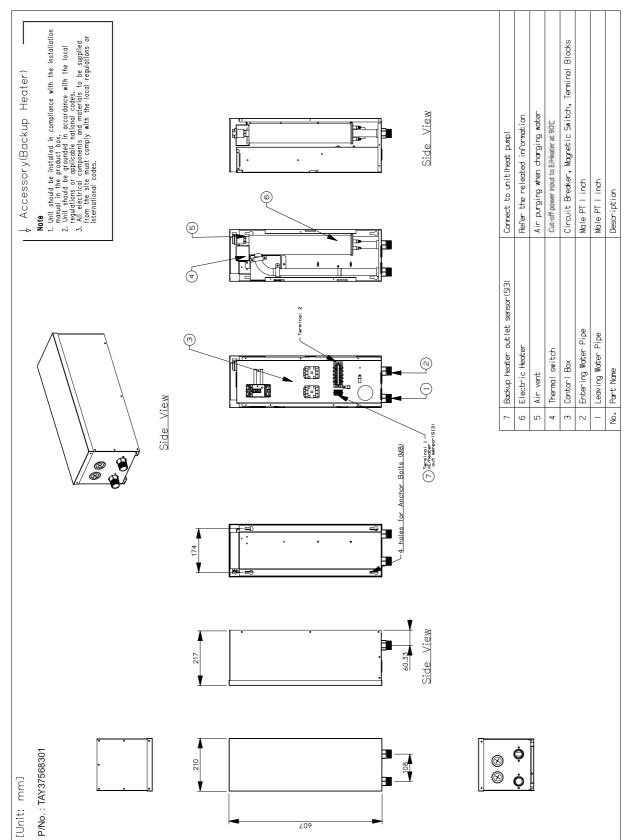


4. Piping Diagram

◆ ZHBW056A1 [HM051MR U44] / ZHBW076A1 [HM071MR U44] / ZHBW096A1 [HM091MR U44] ZHBW126A1 [HM121MR U34] / ZHBW146A1 [HM141MR U34] / ZHBW166A1 [HM161MR U34] ZHBW128A1 [HM123MR U34] / ZHBW148A1 [HM143MR U34] / ZHBW168A1 [HM163MR U34]

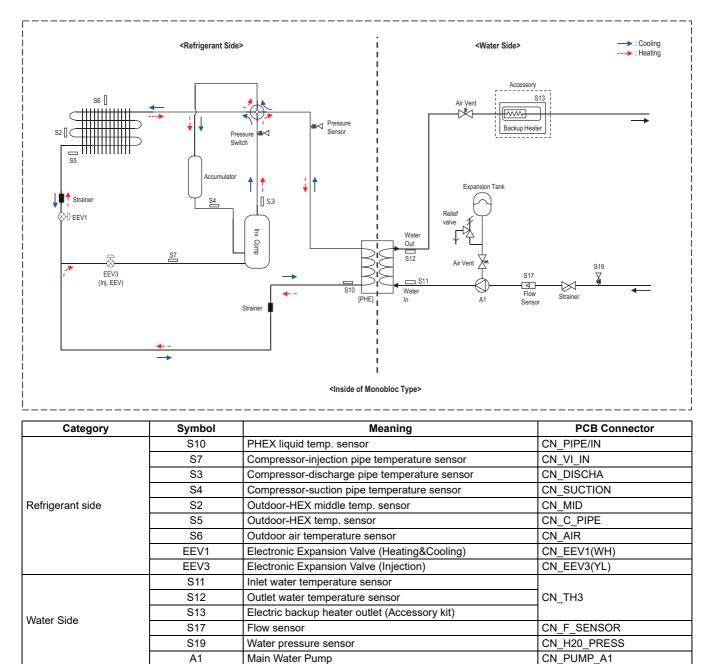


5. Wiring Diagram

ZHBW056A1 [HM051MR U44] / ZHBW076A1 [HM071MR U44] / ZHBW096A1 [HM091MR U44]

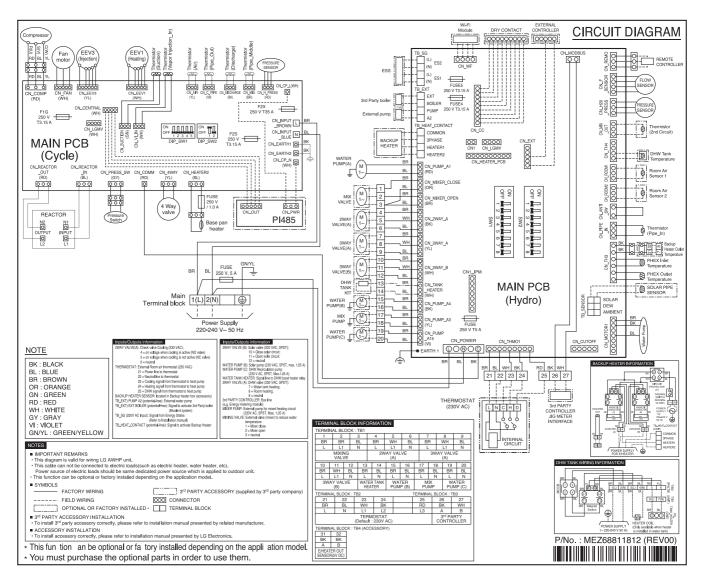


5. Wiring Diagram

ZHBW126A1 [HM121MR U34] / ZHBW146A1 [HM141MR U34] / ZHBW166A1 [HM161MR U34]

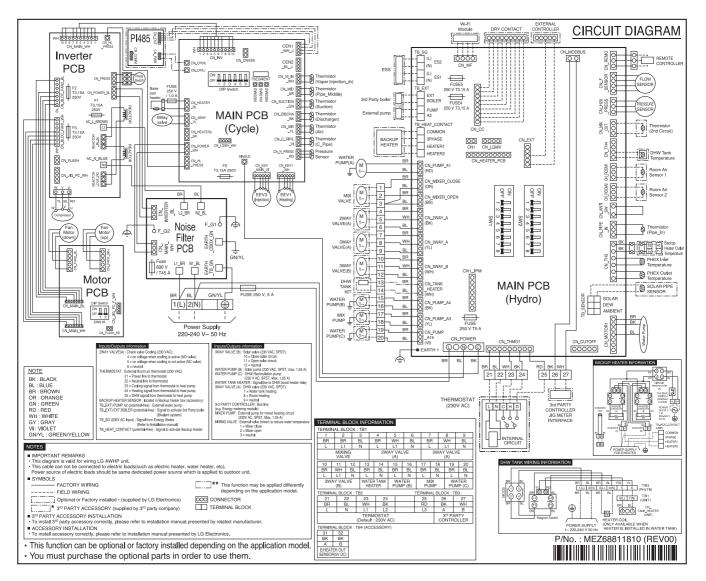

5. Wiring Diagram

ZHBW128A1 [HM123MR U34] / ZHBW148A1 [HM143MR U34] / ZHBW168A1 [HM163MR U34]

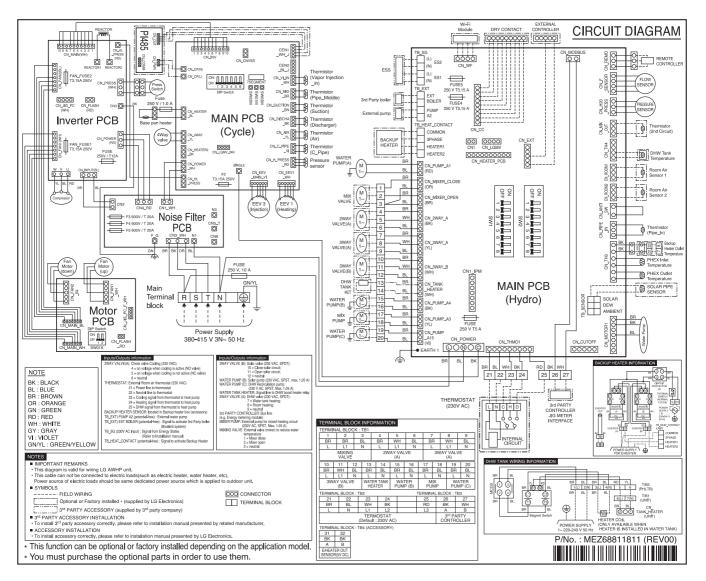

6. Performance Data

6.1 Cooling Operation

Maximum Cooling Capacity

ZHBW056A1 [HM051MR U44]

Outdoor						Wat	ter flow ra	ate 15.81 l	_PM					
Temperature	LWT	7 °C	LWT	10 °C	LWT	13 °C	LWT	15 °C	LWT	18 °C	LWT	20 °C	LWT	22 °C
[°C DB]	тс	EER	TC	EER	тс	EER	тс	EER	тс	EER	тс	EER	тс	EER
10	5.50	5.27	5.50	5.97	5.50	6.45	5.50	6.84	5.50	7.43	5.50	7.83	5.50	8.22
20	5.50	4.48	5.50	5.05	5.50	5.44	5.50	5.76	5.50	6.24	5.50	6.56	5.50	6.88
30	5.50	3.18	5.50	3.70	5.50	4.07	5.50	4.37	5.50	4.81	5.50	5.11	5.50	5.40
35	5.50	3.30	5.50	3.67	5.50	3.92	5.50	4.13	5.50	4.70	5.50	4.65	5.50	4.86
40	5.29	2.66	5.32	3.00	5.36	3.24	5.38	3.44	5.41	3.73	5.43	3.93	5.45	4.13
45	5.09	2.01	5.15	2.34	5.21	2.56	5.25	2.75	5.31	3.02	5.36	3.21	5.40	3.39

ZHBW076A1 [HM071MR U44]

Outdoor						Wat	ter flow ra	ate 20.12 l	_PM					
Temperature	LWT	7 °C	LWT	10 °C	LWT	13 °C	LWT	15 °C	LWT	18 °C	LWT	20 °C	LWT	22 °C
[°C DB]	тс	EER	тс	EER	тс	EER	тс	EER	тс	EER	тс	EER	тс	EER
10	7.00	4.91	7.00	5.65	7.00	6.17	7.00	6.59	7.00	7.21	7.00	7.63	7.00	8.05
20	7.00	4.23	7.00	4.82	7.00	5.23	7.00	5.56	7.00	6.07	7.00	6.40	7.00	6.74
30	7.00	3.54	7.00	3.98	7.00	4.29	7.00	4.54	7.00	4.92	7.00	5.17	7.00	5.42
35	7.00	3.20	7.00	3.57	7.00	3.82	7.00	4.03	7.00	4.50	7.00	4.55	7.00	4.76
40	6.36	2.60	6.45	2.94	6.55	3.17	6.61	3.36	6.71	3.65	6.77	3.84	6.84	4.04
45	5.71	1.99	5.82	2.30	5.92	2.52	5.99	2.70	6.10	2.96	6.17	3.14	6.24	3.31

ZHBW096A1 [HM091MR U44]

Outdoor						Wat	ter flow ra	ate 25.87 l	LPM					
Temperature	LWT	7 °C	LWT	10 °C	LWT	13 °C	LWT	15 °C	LWT	18 °C	LWT	20 °C	LWT	22 °C
[°C DB]	тс	EER	тс	EER	тс	EER	тс	EER	тс	EER	тс	EER	тс	EER
10	9.00	4.55	9.00	5.34	9.00	5.89	9.00	6.33	9.00	7.00	9.00	7.44	9.00	7.89
20	9.00	3.97	9.00	4.59	9.00	5.02	9.00	5.37	9.00	5.90	9.00	6.25	9.00	6.60
30	9.00	3.39	9.00	3.84	9.00	4.16	9.00	4.41	9.00	4.79	9.00	5.05	9.00	5.31
35	9.00	3.10	9.00	3.47	9.00	3.72	9.00	3.93	9.00	4.20	9.00	4.45	9.00	4.66
40	7.66	2.54	7.66	2.87	7.65	3.10	7.65	3.29	7.65	3.57	7.65	3.76	7.65	3.95
45	6.31	1.98	6.35	2.27	6.39	2.48	6.42	2.65	6.45	2.90	6.48	3.07	6.51	3.23

Note

1. DB : Dry bulb temperature(°C), LWT : Leaving water temperature(°C), LPM : Liter per minute (ℓ/min)

2. TC : Total capacity(kW), EER: Energy efficiency ratio(kW/kW), COP : Coefficient of performance (kW/kW)

3. Direct interpolation is permissible. Do not extrapolate.

4. Measuring procedure follows EN14511.

Rated values are based on standard conditions, and it can be found on specifications.

Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

In accordance with the test standard(or nations), the results may vary.

ZHBW126A1 [HM121MR U34] / ZHBW128A1 [HM123MR U34]

Outdoor						Wa	ter flow r	ate 34.5 L	.PM					
Temperature	LWT	7 °C	LWT	10 °C	LWT	13 °C	LWT	15 °C	LWT	18 °C	LWT	20 °C	LWT	22 °C
[°C DB]	тс	EER	TC	EER	TC	EER	TC	EER	TC	EER	TC	EER	TC	EER
10	12.00	5.22	12.00	5.60	12.00	5.87	12.00	6.09	12.00	6.42	12.00	6.64	12.00	6.85
20	12.00	4.45	12.00	4.78	12.00	5.02	12.00	5.20	12.00	5.49	12.00	5.67	12.00	5.86
30	12.00	3.68	12.00	3.96	12.00	4.16	12.00	4.32	12.00	4.55	12.00	4.71	12.00	4.87
35	12.00	3.30	12.00	3.55	12.00	3.73	12.00	3.87	12.00	4.75	12.00	4.23	12.00	4.38
40	11.05	2.81	11.19	3.06	11.33	3.23	11.43	3.37	11.57	3.58	11.67	3.72	11.76	3.85
45	10.10	2.33	10.37	2.57	10.64	2.73	10.83	2.86	11.10	3.07	11.28	3.20	11.46	3.33

ZHBW146A1 [HM141MR U34] / ZHBW148A1 [HM143MR U34]

Outdoor						Wa	ter flow r	ate 40.3 L	.PM					
Temperature	LWT	7 °C	LWT	10 °C	LWT	13 °C	LWT	15 °C	LWT	18 °C	LWT	20 °C	LWT	22 °C
[°C DB]	TC	EER	TC	EER	TC	EER	TC	EER	TC	EER	TC	EER	TC	EER
10	12.50	4.93	12.80	5.33	13.10	5.61	13.30	5.84	13.60	6.18	13.80	6.40	14.00	6.63
20	14.00	4.28	14.00	4.61	14.00	4.84	14.00	5.03	14.00	5.31	14.00	5.50	14.00	5.69
30	14.00	3.63	14.00	3.89	14.00	4.08	14.00	4.23	14.00	4.45	14.00	4.60	14.00	4.75
35	14.00	3.30	14.00	3.53	14.00	3.69	14.00	3.82	14.00	4.30	14.00	4.15	14.00	4.28
40	12.35	2.81	12.60	3.04	12.84	3.20	13.01	3.32	13.26	3.52	13.42	3.64	13.59	3.77
45	10.69	2.32	11.19	2.54	11.69	2.70	12.02	2.82	12.51	3.01	12.84	3.14	13.17	3.26

ZHBW166A1 [HM161MR U34] / ZHBW168A1 [HM163MR U34]

Outdoor						Wa	ter flow ra	ate 46.0 L	.PM					
Temperature	LWT	7 °C	LWT	10 °C	LWT	13 °C	LWT	15 °C	LWT	18 °C	LWT	20 °C	LWT	22 °C
[°C DB]	TC	EER	TC	EER	тс	EER	TC	EER	TC	EER	TC	EER	TC	EER
10	13.00	4.64	13.60	5.05	14.20	5.35	14.60	5.58	15.20	5.94	15.60	6.17	16.00	6.41
20	16.00	4.02	16.00	4.37	16.00	4.61	16.00	4.81	16.00	5.10	16.00	5.30	16.00	5.50
30	16.00	3.41	16.00	3.68	16.00	3.88	16.00	4.03	16.00	4.27	16.00	4.42	16.00	4.58
35	16.00	3.10	16.00	3.34	16.00	3.51	16.00	3.65	16.00	4.00	16.00	3.99	16.00	4.12
40	13.60	2.70	13.96	2.92	14.32	3.08	14.56	3.20	14.92	3.39	15.16	3.52	15.40	3.64
45	11.20	2.29	11.76	2.50	12.32	2.64	12.69	2.76	13.25	2.93	13.62	3.05	14.00	3.16

Note

1. DB : Dry bulb temperature ($^{\circ}$), LWT : Leaving water temperature ($^{\circ}$), LPM : Liter per minute (ℓ /min)

2. TC : Total capacity(kW), EER: Energy efficiency ratio(kW/kW), COP : Coefficient of performance (kW/kW)

3. Direct interpolation is permissible. Do not extrapolate.

4. Measuring procedure follows EN14511.

• Rated values are based on standard conditions, and it can be found on specifications.

· Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

• In accordance with the test standard(or nations), the results may vary.

6. Performance Data

6.2 Heating Operation

Maximum Heating Capacity (Include defrost effect)

ZHBW056A1 [HM051MR U44]

Outdoor			Wate	er flow ra	te 15.81	LPM			Wat	er flow i	rate 9.9 l	_PM	Wat	er flow i	rate 7.9	LPM
Temperature	LWT	30 °C	LWT	35 °C	LWT	40 °C	LWT	45 °C	LWT	50 °C	LWT	55 °C	LWT	60 °C	LWT	65 °C
[°C DB]	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP
-25	5.50	2.02	5.50	1.88	5.50	1.74	5.50	1.60								
-20	5.50	2.57	5.50	2.38	5.50	2.19	5.50	2.00	5.23	1.82						
-15	5.50	2.80	5.50	2.50	5.50	2.45	5.50	2.41	5.23	2.17	5.23	1.93				
-7	5.50	3.59	5.50	3.20	5.50	3.13	5.50	3.05	5.50	2.74	5.50	2.23	5.50	2.11		
-4	5.50	3.88	5.50	3.60	5.50	3.45	5.50	3.29	5.50	2.95	5.50	2.61	5.50	2.27	5.50	1.93
-2	5.50	4.31	5.50	3.80	5.50	3.63	5.50	3.46	5.50	3.11	5.50	2.75	5.50	2.39	5.50	2.03
2	5.50	4.73	5.50	4.20	5.50	4.00	5.50	3.80	5.50	3.41	5.50	3.02	5.50	2.63	5.50	2.24
7	5.50	5.26	5.50	4.70	5.50	4.47	5.50	4.23	5.50	3.80	5.50	3.36	5.50	2.93	5.50	2.49
10	5.50	5.87	5.50	5.41	5.50	4.95	5.50	4.49	5.50	4.03	5.50	3.57	5.50	3.11	5.50	2.64
15	5.50	6.43	5.50	5.92	5.50	5.42	5.50	4.91	5.50	4.41	5.50	3.91	5.50	3.40	5.50	2.90
18	5.50	6.76	5.50	6.23	5.50	5.70	5.50	5.17	5.50	4.64	5.50	4.11	5.50	3.58	5.50	3.05
20	5.50	6.98	5.50	6.43	5.50	5.89	5.50	5.34	5.50	4.79	5.50	4.25	5.50	3.70	5.50	3.15
35	5.50	8.65	5.50	7.97	5.50	7.30	5.50	6.62	5.50	5.95	5.50	5.27	5.50	4.60	5.50	3.92

ZHBW076A1 [HM071MR U44]

Outdoor			Wate	r flow ra	te 20.12	LPM			Wate	er flow r	ate 12.6	LPM	Wate	er flow r	ate 10.0	LPM
Temperature	LWT	30 °C	LWT	35 °C	LWT	40 °C	LWT	45 °C	LWT	50 °C	LWT	55 °C	LWT	60 °C	LWT	65 °C
[°C DB]	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP
-25	5.85	1.98	5.85	1.84	5.85	1.69	5.85	1.55								
-20	6.43	2.53	6.43	2.34	6.43	2.15	6.43	1.96	6.10	1.76						
-15	7.00	2.77	7.00	2.45	7.00	2.41	7.00	2.36	6.65	2.12	6.65	1.89				
-7	7.00	3.55	7.00	3.15	7.00	3.08	7.00	3.01	7.00	2.70	7.00	2.19	7.00	2.07		
-4	7.00	3.85	7.00	3.58	7.00	3.41	7.00	3.25	7.00	2.91	7.00	2.57	7.00	2.23	7.00	1.89
-2	7.00	4.27	7.00	3.78	7.00	3.60	7.00	3.42	7.00	3.07	7.00	2.71	7.00	2.35	7.00	1.99
2	7.00	4.69	7.00	4.19	7.00	3.98	7.00	3.76	7.00	3.37	7.00	2.98	7.00	2.59	7.00	2.20
7	7.00	5.22	7.00	4.70	7.00	4.45	7.00	4.19	7.00	3.76	7.00	3.32	7.00	2.89	7.00	2.45
10	7.00	5.83	7.00	5.37	7.00	4.91	7.00	4.45	7.00	3.99	7.00	3.53	7.00	3.06	7.00	2.60
15	7.00	6.38	7.00	5.88	7.00	5.38	7.00	4.87	7.00	4.37	7.00	3.87	7.00	3.36	7.00	2.86
18	7.00	6.72	7.00	6.19	7.00	5.66	7.00	5.13	7.00	4.60	7.00	4.07	7.00	3.54	7.00	3.01
20	7.00	6.94	7.00	6.39	7.00	5.85	7.00	5.30	7.00	4.75	7.00	4.21	7.00	3.66	7.00	3.11
35	7.00	8.60	7.00	7.93	7.00	7.25	7.00	6.58	7.00	5.90	7.00	5.23	7.00	4.55	7.00	3.88

ZHBW096A1 [HM091MR U44]

Outdoor			Wate	r flow ra	te 25.87	. LPM			Wat	er flow r	ate 16.2	LPM	Wate	er flow r	ate 12.9	LPM
Temperature	LWT	30 °C	LWT	35 °C	LWT	40 °C	LWT	45 °C	LWT	50 °C	LWT	55 °C	LWT	60 °C	LWT	65 °C
[°C DB]	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP
-25	6.20	1.97	6.20	1.82	6.20	1.68	6.20	1.53								
-20	7.60	2.50	7.60	2.31	7.60	2.12	7.60	1.93	7.22	1.74						
-15	9.00	2.73	9.00	2.40	9.00	2.36	9.00	2.32	8.55	2.09	8.55	1.85				
-7	9.00	3.50	9.00	3.10	9.00	3.03	9.00	2.96	9.00	2.65	9.00	2.17	9.00	2.03		
-4	9.00	3.79	9.00	3.50	9.00	3.35	9.00	3.20	9.00	2.86	9.00	2.52	9.00	2.19	9.00	1.85
-2	9.00	4.20	9.00	3.70	9.00	3.53	9.00	3.36	9.00	3.01	9.00	2.66	9.00	2.30	9.00	1.95
2	9.00	4.61	9.00	4.10	9.00	3.90	9.00	3.70	9.00	3.31	9.00	2.92	9.00	2.54	9.00	2.15
7	9.00	5.13	9.00	4.60	9.00	4.36	9.00	4.11	9.00	3.68	9.00	3.26	9.00	2.83	9.00	2.40
10	9.00	5.72	9.00	5.27	9.00	4.82	9.00	4.36	9.00	3.91	9.00	3.46	9.00	3.00	9.00	2.55
15	9.00	6.26	9.00	5.77	9.00	5.27	9.00	4.78	9.00	4.28	9.00	3.79	9.00	3.29	9.00	2.80
18	9.00	6.59	9.00	6.07	9.00	5.55	9.00	5.03	9.00	4.51	9.00	3.99	9.00	3.47	9.00	2.95
20	9.00	6.80	9.00	6.27	9.00	5.73	9.00	5.20	9.00	4.66	9.00	4.12	9.00	3.59	9.00	3.05
35	9.00	8.43	9.00	7.77	9.00	7.11	9.00	6.44	9.00	5.78	9.00	5.12	9.00	4.46	9.00	3.80

Note

1. DB : Dry bulb temperature (°C), LWT : Leaving water temperature (°C), LPM : Liter per minute (ℓ /min)

2. TC : Total capacity(kW), EER: Energy efficiency ratio(kW/kW), COP : Coefficient of performance (kW/kW)

3. Direct interpolation is permissible. Do not extrapolate.

4. Measuring procedure follows EN14511.

- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- · In accordance with the test standard(or nations), the results may vary.

[•] Rated values are based on standard conditions, and it can be found on specifications.

6. Performance Data

ZHBW126A1 [HM121MR U34] / ZHBW128A1 [HM123MR U34]

	-			-			-			-						
Outdoor			Wate	er flow r	ate 34.5	LPM			Wate	er flow r	ate 21.6	LPM	Wate	er flow r	ate 17.3	LPM
Temperature	LWT	30 °C	LWT	35 °C	LWT	40 °C	LWT	45 °C	LWT	50 °C	LWT	55 °C	LWT	60 °C	LWT	65 °C
[°C DB]	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP
-25	9.50	2.13	9.50	1.97	9.50	1.81	9.50	1.65								
-20	10.75	2.68	10.75	2.47	10.75	2.27	10.75	2.07	10.21	1.87						
-15	12.00	2.90	12.00	2.55	12.00	2.52	12.00	2.49	11.50	2.24	11.50	2.00				
-7	12.00	3.69	12.00	3.40	12.00	3.28	12.00	3.16	12.00	2.85	12.00	2.53	12.00	2.24		
-4	12.00	3.98	12.00	3.73	12.00	3.57	12.00	3.41	12.00	3.07	12.00	2.74	12.00	2.40	12.00	2.06
-2	12.00	4.18	12.00	3.78	12.00	3.68	12.00	3.58	12.00	3.22	12.00	2.87	12.00	2.51	12.00	2.16
2	12.00	4.57	12.00	4.19	12.00	4.05	12.00	3.91	12.00	3.52	12.00	3.14	12.00	2.75	12.00	2.36
7	12.00	5.34	12.00	4.90	12.00	4.62	12.00	4.33	12.00	3.90	12.00	3.47	12.00	3.04	12.00	2.61
10	12.00	5.95	12.00	5.50	12.00	5.04	12.00	4.58	12.00	4.13	12.00	3.67	12.00	3.21	12.00	2.76
15	12.00	6.50	12.00	6.00	12.00	5.50	12.00	5.00	12.00	4.50	12.00	4.00	12.00	3.50	12.00	3.01
18	12.00	6.83	12.00	6.30	12.00	5.78	12.00	5.25	12.00	4.73	12.00	4.20	12.00	3.68	12.00	3.15
20	12.00	7.04	12.00	6.50	12.00	5.96	12.00	5.42	12.00	4.88	12.00	4.34	12.00	3.80	12.00	3.25
35	12.00	8.68	12.00	8.01	12.00	7.34	12.00	6.68	12.00	6.01	12.00	5.34	12.00	4.67	12.00	4.00

ZHBW146A1 [HM141MR U34] / ZHBW148A1 [HM143MR U34]

	-			-			-			-						
Outdoor		Water flow rate 40.25 LPM							Water flow rate 25.2 LPM			LPM	Water flow rate 20.1 LPM			
Temperature	LWT	30 °C	LWT	35 °C	LWT	40 °C	LWT	45 °C	LWT	50 °C	LWT	55 °C	LWT	60 °C	LWT	65 °C
[°C DB]	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP
-25	10.00	2.09	10.00	1.93	10.00	1.78	10.00	1.62								
-20	12.00	2.62	12.00	2.42	12.00	2.23	12.00	2.03	11.40	1.83						
-15	14.00	2.84	14.00	2.50	14.00	2.47	14.00	2.44	13.30	2.19	13.30	1.95				
-7	14.00	3.61	14.00	3.34	14.00	3.21	14.00	3.09	14.00	2.78	14.00	2.47	14.00	2.16		
-4	14.00	3.90	14.00	3.65	14.00	3.49	14.00	3.33	14.00	3.00	14.00	2.67	14.00	2.33	14.00	2.00
-2	14.00	4.09	14.00	3.86	14.00	3.68	14.00	3.50	14.00	3.15	14.00	2.80	14.00	2.45	14.00	2.10
2	14.00	4.73	14.00	4.28	14.00	4.05	14.00	3.83	14.00	3.45	14.00	3.06	14.00	2.68	14.00	2.30
7	14.00	5.24	14.00	4.80	14.00	4.52	14.00	4.24	14.00	3.82	14.00	3.40	14.00	2.97	14.00	2.55
10	14.00	5.83	14.00	5.39	14.00	4.94	14.00	4.49	14.00	4.04	14.00	3.60	14.00	3.15	14.00	2.70
15	14.00	6.37	14.00	5.88	14.00	5.39	14.00	4.90	14.00	4.42	14.00	3.93	14.00	3.44	14.00	2.95
18	14.00	6.69	14.00	6.18	14.00	5.67	14.00	5.15	14.00	4.64	14.00	4.13	14.00	3.61	14.00	3.10
20	14.00	6.91	14.00	6.38	14.00	5.85	14.00	5.32	14.00	4.79	14.00	4.26	14.00	3.73	14.00	3.20
35	14.00	8.52	14.00	7.86	14.00	7.21	14.00	6.56	14.00	5.91	14.00	5.25	14.00	4.60	14.00	3.95

ZHBW166A1 [HM161MR U34] / ZHBW168A1 [HM163MR U34]

Outdoor			Wate	er flow r	ate 46.0	LPM			Water flow rate 28.8 LPM				Wate	Water flow rate 23.0 LPM			
Temperature	LWT	30 °C	LWT	35 °C	LWT	40 °C	LWT	45 °C	LWT	50 °C	LWT	55 °C	LWT	60 °C	LWT	65 °C	
[°C DB]	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	TC	COP	
-25	10.50	1.96	10.50	1.84	10.50	1.72	10.50	1.60									
-20	13.25	2.48	13.25	2.32	13.25	2.15	13.25	1.98	12.59	1.82							
-15	16.00	2.71	14.40	2.45	14.40	2.41	14.40	2.37	13.68	2.16	13.68	1.94					
-7	16.00	3.46	16.00	3.27	16.00	3.13	16.00	2.98	16.00	2.70	16.00	2.41	16.00	2.12			
-4	16.00	3.75	16.00	3.58	16.00	3.40	16.00	3.22	16.00	2.90	16.00	2.58	16.00	2.27	16.00	1.95	
-2	16.00	4.16	16.00	3.78	16.00	3.58	16.00	3.38	16.00	3.05	16.00	2.72	16.00	2.38	16.00	2.05	
2	16.00	4.57	16.00	4.19	16.00	3.95	16.00	3.71	16.00	3.35	16.00	2.98	16.00	2.62	16.00	2.25	
7	16.00	5.08	16.00	4.70	16.00	4.41	16.00	4.13	16.00	3.72	16.00	3.31	16.00	2.91	16.00	2.50	
10	16.00	5.67	16.00	5.24	16.00	4.80	16.00	4.37	16.00	3.94	16.00	3.51	16.00	3.08	16.00	2.65	
15	16.00	6.20	16.00	5.73	16.00	5.26	16.00	4.79	16.00	4.32	16.00	3.84	16.00	3.37	16.00	2.90	
18	16.00	6.52	16.00	6.03	16.00	5.53	16.00	5.04	16.00	4.54	16.00	4.04	16.00	3.55	16.00	3.05	
20	16.00	6.74	16.00	6.23	16.00	5.71	16.00	5.20	16.00	4.69	16.00	4.18	16.00	3.66	16.00	3.15	
35	16.00	8.35	16.00	7.71	16.00	7.08	16.00	6.44	16.00	5.81	16.00	5.17	16.00	4.54	16.00	3.90	

Note

1. DB : Dry bulb temperature (°C), LWT : Leaving water temperature (°C), LPM : Liter per minute (ℓ /min)

2. TC : Total capacity(kW), EER: Energy efficiency ratio(kW/kW), COP : Coefficient of performance (kW/kW)

3. Direct interpolation is permissible. Do not extrapolate.

4. Measuring procedure follows EN14511.

• Rated values are based on standard conditions, and it can be found on specifications.

· Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

In accordance with the test standard(or nations), the results may vary.

7. Electric Characteristics

Wiring of Main Power Supply and Equipment Capacity

- 1. Bear in mind ambient conditions (ambient temperature, direct sunlight, rain liquid, etc.) when proceeding with the wiring and connections
- 2. The wire size is the minimum value for metal conduit wiring. The power cord size should be 1 rank thicker taking into account the line voltage drops. Make sure the power-supply voltage does not drop more than 10%.
- 3. Specific wiring requirements should adhere to the wiring regulations of the region.
- 4. Power supply cords of parts of appliances for outdoor use should not be lighter than polychloroprene sheathed flexible cord.
- 5. Don't install an individual switch or electrical outlet to disconnect each of indoor unit separately from the power supply.

- Follow ordinance of your governmental organization for technical standard related to electrical equipment, wiring regulations and guidance of each electric power company.
- Make sure to use specified wires for connections so that no external force is imparted to terminal connections. If connections are not fixed firmly, it may cause heating or fire.
- Make sure to use the appropriate type of overcurrent protection switch. Note that generated overcurrent
 may include some amount of direct current.

- All installation site must require attachment of an earth leakage breaker. If no earth leakage breaker is installed, it may cause an electric shock.
- Do not use anything other than breaker and fuse with correct capacity. Using fuse and wire or copper wire with too large capacity may cause a malfunction of unit or fire.


7. Electric Characteristics

Outdoor Unit	Phase / Volts / Hz	Voltage range		
ZHBW056A1 [HM051MR U44]				
ZHBW076A1 [HM071MR U44]	1 Ø / 220-240 V / 50 Hz			
ZHBW096A1 [HM091MR U44]		Min. : 198		
ZHBW126A1 [HM121MR U34]		Max. : 264		
ZHBW146A1 [HM141MR U34]	1 Ø / 220-240 V / 50 Hz			
ZHBW166A1 [HM161MR U34]				
ZHBW128A1 [HM123MR U34]				
ZHBW148A1 [HM143MR U34]	3 Ø / 380-415 V / 50 Hz	Min. : 342 Max. : 457		
ZHBW168A1 [HM163MR U34]		Max 407		

Backup Heater	Power Supply for Heater						
Васкир пеатег	Phase / Volts / Hz	Capacity (kW)					
AHEH036A [HA031M E1]	1 Ø / 220-240 V / 50 Hz	3					
AHEH066A [HA061M E1]	1 Ø / 220-240 V / 50 HZ	3+3					
AHEH068A [HA063M E1]	3 Ø / 380-415 V / 50 Hz	2+2+2					

DHW Boost Heater	Power Supply for DHW Boost Heater						
Driv Boost Heater	Phase / Volts / Hz	Capacity (kW)					
Integral part of DHW tanks [OSHW-x00F(D)]	1 Ø / 220-240 V / 50 Hz	2.4					

[Power Supply for Heat pump, Backup heater and DHW boost heater]

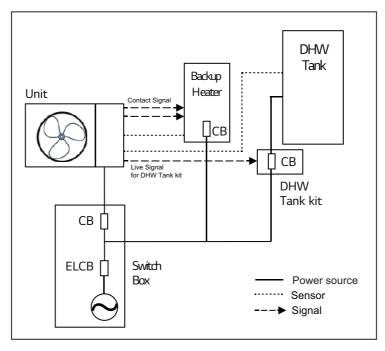


Note

1. Voltage supplied to the unit terminals should be within the minimum and maximum range.

2.Maximum allowable voltage unbalance between phase is 2%.

8. Operation Range

Cooling

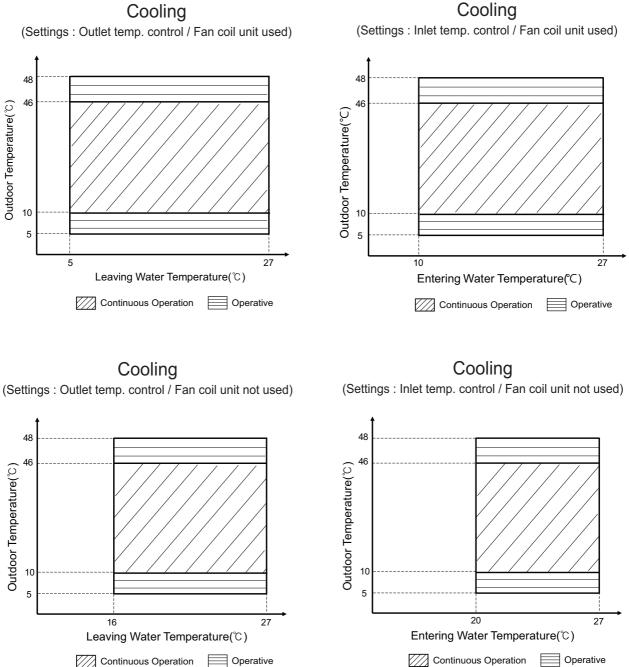


Note

- Continuous Operation : It is possible to operate continuously, but capacity is not guaranteed. •
- Operative : It is not guaranteed continuous operation.

Cooling

8. Operation Range

Heating

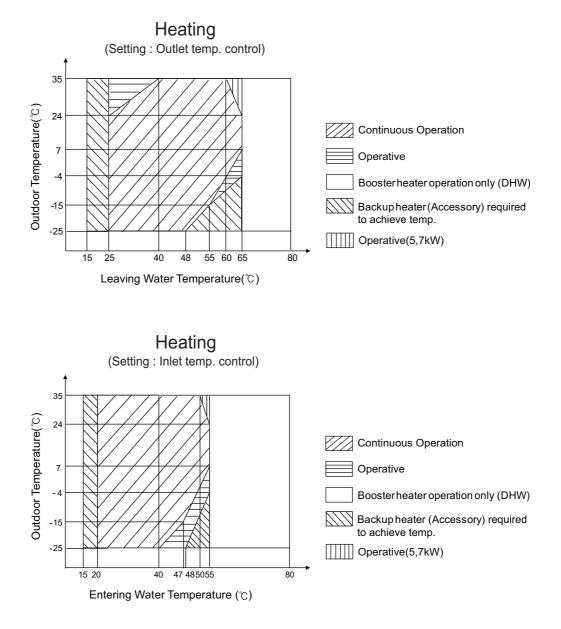

Note

- · Continuous Operation : It is possible to operate continuously, but capacity is not guaranteed.
- Operative : It is not guaranteed continuous operation.
- DHW Heat pump operation : max. 58 °C
- + DHW operation with booster heater : max. 80 $^\circ\text{C}$

9. Sound levels


9.1 Sound power level

Note


- 1. Data is valid at diffuse field condition.
- 2. Reference acoustic intensity $0dB = 10E-6\mu W/m^2$
- 3. Sound power level is measured on the rated condition in the reverberation rooms. Refer to the Model Specifications for nominal conditions(Power source and Ambient temperature, etc)
- 4. Sound levels can be increased in accordance with installation and operating conditions.
- 5. Sound level will vary depending on a range of factors such as the construction (acoustic absorption coefficient) of particular installed place in which the equipment in installed.
- 6. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

Model	Heating [dB(A)]						
Model	Day Max	Rated	Low noise				
ZHBW056A1 [HM051MR U44]	63	57	54				
ZHBW076A1 [HM071MR U44]	64	57	55				
ZHBW096A1 [HM091MR U44]	64	57	55				
ZHBW126A1 [HM121MR U34]	65	60	56				
ZHBW146A1 [HM141MR U34]	66	61	57				
ZHBW166A1 [HM161MR U34]	66	61	57				
ZHBW128A1 [HM123MR U34]	65	60	56				
ZHBW148A1 [HM143MR U34]	66	61	57				
ZHBW168A1 [HM163MR U34]	66	61	57				


ZHBW056A1 [HM051MR U44]



ZHBW071A1 [HM071MR U44]




ZHBW096A1 [HM091MR U44]




9. Sound levels


ZHBW126A1 [HM121MR U34] ZHBW128A1 [HM123MR U34]



ZHBW146A1 [HM141MR U34] ZHBW148A1 [HM143MR U34]



ZHBW166A1 [HM161MR U34] ZHBW168A1 [HM163MR U34]



10. Hydraulic Performance

The water pump is variable type which is capable to change flow rate, so it may be required to change default water pump capacity in case of noise by water flow. In most case, however, it is strongly recommended to set capacity as Maximum.

Pressure Drop

Capacity [kW]	Rated flow-rate [LPM]	Pump Head [m] (at rated flow- rate)	Product pressure drop [m] (Plate heat exchanger)	Serviceable Head [m]	Min. flow-rate [LPM] (Recommend)
5	15.8	7.5	0.2	7.3	
7	20.1	7.3	0.3	7.0	15
9	25.9	6.1	0.4	5.7	
12	34.5	9.8	0.8	9.0	
14	40.3	9.3	1.1	8.2	20
16	46.0	9.0	1.4	7.6	

Note

• To secure enough water flow rate, do not set water pump capacity as Minimum.


It can lead unexpected flow rate error CH14.

• When installing the product, install additional pump in consideration of the pressure loss and pump performance.

• If flow-rate is low, overloading of product can occur.

10. Hydraulic Performance


• UN36A Chassis (5, 7, 9 kW)

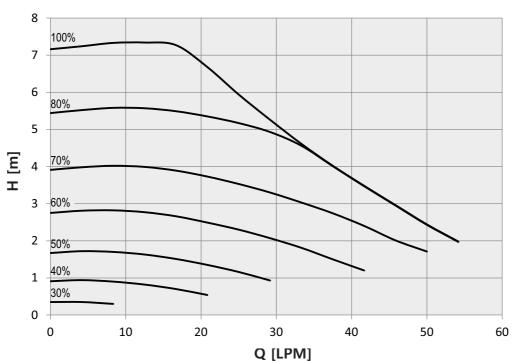





Q-H Chart

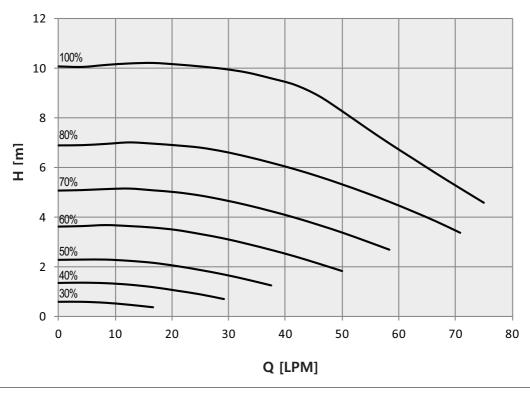

Note

Performance test based on standard ISO 9906 with pre-pressure 2.0 bar and liquid temperature 20°C.



Design and installation

Refrigerant R32
 Select the Best Location
 Installation Space
 Water Control
 Lifting Method
 Installation
 Dip Switch Setting

1. Refrigerant R32

The refrigerant R32 has the higher efficiency and more friendly for environment in comparison with R410A. It has a lower GWP (Global Warming Potential) value, and higher efficiency than R410A. The Ozone Depletion Potential (ODP) of R32 is 0, and Global Warming Potential(GWP) is 675.

Refrigerant piping consists of copper/steel pipes, joints, and other fittings. All components must be selected and installed in conformity with the standards pertaining to the Refrigeration Safety Regulation. Same piping as for R410A can be used.

- This product contains fluorinated greenhouse gases (Refrigerant type : R32). Do NOT emit refrigerant gases into the atmosphere.
- The refrigerant R32 is Slightly Flammable gas. But it does not leak normally. If the refrigerant leaks in the installed place and contact with burning energy, it may cause fire, or a harmful gas.
- If there are some leak, turn off any combustible devices, ventilate the installed place, and contact the dealer from which you purchased the unit. Do not use the unit until the refrigerant leaked is repaired.
- Only use R32 as refrigerant. Other substances may cause explosions and accidents.

- The wall thickness of the piping should comply with the relevant local and national regulations for the designed pressure.
- · For high-pressure refrigerant, any unapproved pipe must not be used.
- Do not heat pipes more than necessary to prevent them from softening.

2. Select the Best Location


Select space for installing unit, which will meet the following conditions:

- No direct thermal radiation from other heat sources
- · No possibility of annoying neighbors by noise from unit
- No exposition to strong wind
- · With strength which bears weight of unit
- · With space for air passage and service work shown next
- Because of the possibility of fire, do not install unit to the space where generation, inflow, stagnation, and leakage of combustible gas is expected.
- Avoid unit installation in a place where acidic solution and spray (sulfur) are often used.
- Do not use unit under any special environment where oil, steam and sulfuric gas exist.
- It is recommended to fence round the unit in order to prevent any person or animal from accessing the unit.
- If installation site is area of heavy snowfall, then the following directions should be observed.
 - Make the foundation as high as possible.
 - Fit a snow protection hood.
- Select installation location considering following conditions to avoid bad condition when additionally performing defrost operation.
 - 1. Install the unit at a place well ventilated and having a lot of sunshine in case of installing the product at a place with a high humidity in winter (near beach, coast, lake, etc).
 - 2. Performance of heating will be reduced and pre-heat time of the unit may be lengthened in case of installing the unit in winter at following location:
 - 1) Shade position with a narrow space
 - 2) Location with much humidity around.
 - 3) Location where liquid gathers since the floor is not even.
- When installing the unit in a place that is constantly exposed to a strong wind like a coast or on a high story of a building, secure a normal fan operation by using a duct or a wind shield.
 - 1. Install the unit so that its discharge port faces to the wall of the building. Keep a distance 300 mm or more between the unit and the wall surface.
 - 2. Supposing the wind direction during the operation season of the unit, install the unit so that the discharge port is set at right angle to the wind direction.

3. Installation Space

3.1 General considerations

- If an awning is built over the unit to prevent direct sunlight or rain exposure, make sure that heat radiation from the condenser is not restricted.
- Ensure that the spaces indicated by arrows around front, back and side of the unit.
- Do not place animals and plants in the path of the warm or cold air.
- Take the unit weight into account and select a place where noise and vibration are minimum.
- Select a place so that the air flow and noise from the unit do not disturb neighbors.
- Place that can sufficiently endure the weight and vibration of the outdoor unit and where even installation is possible.
- Place that has no direct influence of snow or rain.
- Place with no danger of extreme snowfall or icicle drop.
- Place without weak floor or base such as decrepit part of the building or with a lot of snow accumulation.



* Please secure the space, considering field installation of the shut-off valve and strainer.

4. Water Control

4.1 Water quality

Water quality should be complied with EN 98/83 EC Directives.

- If the product is installed at existing hydraulic water loop, it is important to clean hydraulic pipes to remove sludge and scale.
- Installing sludge strainer in the water loop is very important to prevent performance degrade.
- · Chemical treatment to prevent rust should be performed by installer.
- It is strongly recommended to install an additional filter on the heating water circuit. Especially to remove metallic
 particles from the heating piping, it is advised to use a magnetic or cyclone filter, which can remove small
 particles. Small particles may damage the unit and will NOT be removed by the standard filter of the heat pump
 system.
- Water quality check should be implemented before completing the installation of system. Detailed guide can be found in the table as below.

Water contents	Value				
рН	7.5~9.0				
Conductivity	10~500 uS/cm				
TDS (Total dissolved solids)	8~400 ppm				
Alkalinity (HCO ₃ ⁻)	60~300 (mg/L)				
Total hardness	4 ~ 8.5 °dH				
		71.4 ~ 1	51.7 (mg/L)		
Iron (Fe)	\leq 0.2 (mg/L)				
Sulphate (SO ₄ ²⁻)	≤ 100 (mg/L)				
Nitrite (NO ₃ ⁻)	≤ 100 (mg/L)				
Free chlorine (Cl ₂)	≤ 1 (mg/L)				
	ppm		STS316	STS304	
	pH7	15℃	3,000	180	
		40 ℃	500	50	
		60 ℃	200	30	
Chlorides (Cl⁻)		ී 08	125	20	
	рН9	15℃	18,000	700	
		40 ℃	2,600	250	
		60 ℃	1,000	170	
		30℃	550	130	

4. Water Control

4.2 Frost protection

In areas of the country where entering water temperatures drop below 0 °C, the water pipe must be protected by using an approved antifreeze solution. Consult your heat pump unit supplier for locally approved solutions in your area.

Calculate the approximate volume of water in the system. And add the water volume contained in the heat pump to this total volume.

Antifreeze type	Antifreeze mixing ratio (by volume)					
	0°C	-5°C	-10°C	-15°C	-20°C	-25°C
Methanol	0%	6%	12%	16%	24%	30%
Ethylene glycol	0%	12%	20%	30%	-	-
Propylene glycol	0%	17%	25%	33%	-	-


- Use only one of the above antifreeze.
- If a antifreeze is used, pressure drop and capability degradation of the system can be occurred.
- If one of antifreezes is used, corrosion can be occurred. So please add corrosion inhibitor.
- Please check the concentration of the antifreeze periodically to keep same concentration.
- When the antifreeze is used (for installation or operation), take care to ensure that antifreeze must not be touched.
- Ensure to respect all laws and norms of your country about antifreeze usage.

4. Water Control


4.3 Capacity correction factor by antifreeze

Antifreeze Type	Item	Antifreeze % by wt				
		10%	20%	30%	40%	50%
Methanol	Cooling	0.998	0.997	0.995	0.993	0.992
	Heating	0.995	0.990	0.985	0.979	0.974
	Pressure Drop	1.023	1.057	1.091	1.122	1.160
Ethylene glycol	Cooling	0.996	0.991	0.987	0.983	0.979
	Heating	0.993	0.985	0.977	0.969	0.961
	Pressure Drop	1.024	1.068	1.124	1.188	1.263
Propylene glycol	Cooling	0.993	0.987	0.980	0.974	0.968
	Heating	0.966	0.973	0.960	0.948	0.935
	Pressure Drop	1.040	1.098	1.174	1.273	1.405

Correction factor of cooling capacity

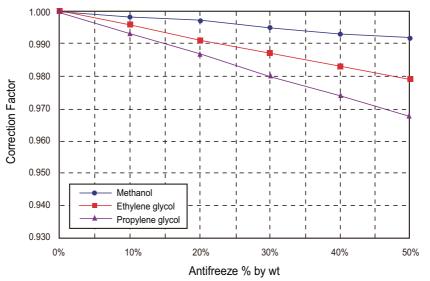


Correction factor of heating capacity

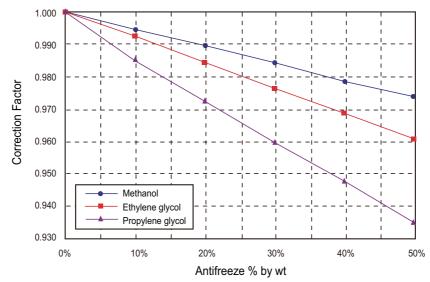

5. Lifting Method

- When carrying the suspended unit, pass the ropes under the unit and use the two suspension points each at the front and rear.
- Always lift the unit with ropes attached at four points so that impact is not applied to the unit.
- Attach the ropes to the unit at an angle of 40° or less.
- Use only accessories and parts which are of the designated specification when installing.

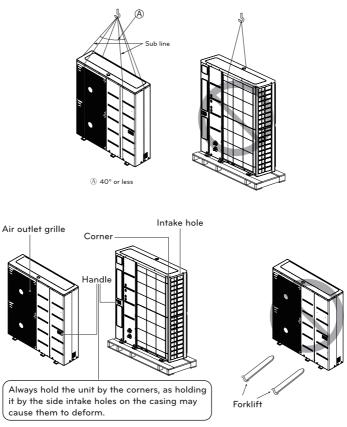



- Do not have only one person carry product if it is more than 20 kg.
- PP bands are used to pack some products. Do not use them as a mean for transportation because they are dangerous.
- Do not touch heat exchanger fins with your bare hands. Otherwise you may get a cut in your hands.
- Tear plastic packaging bag and scrap it so that children cannot play with it. Otherwise plastic packaging bag may suffocate children to death.
- When carrying in Outdoor Unit, be sure to support it at four points. Carrying in and lifting with 3-point support may make Outdoor Unit unstable, resulting in a fall.
- Place extra cloth or boards in the locations where the casing comes in contact with the sling to prevent damage.
- Hoist the unit making sure it is being lifted at its center of gravity.

6. Installation

6.1 Foundation for Installation


- Check the strength and level of the installation ground so that the unit will not cause any operating vibration or noise after installation.
- Fix the unit securely by means of the foundation bolts.
 (Prepare 4sets of M12 foundation bolts, nuts and washers each which are available on the market.)
- It is best to screw in the foundation bolts until their length are 20mm from the foundation surface.

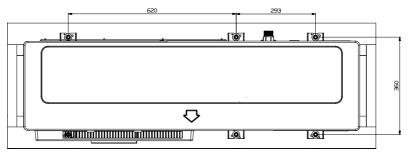

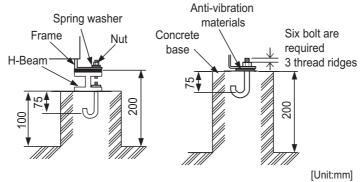

Foundation bolt executing method

- Be sure to remove the Pallet(Wood Support) of the bottom side of the outdoor unit Base Pan before fixing the bolt. It may cause the unstable state of the outdoor settlement, and may cause freezing of the heat exchanger resulting in abnormal operations.
- Be sure to remove the Pallet(Wood Support) of the bottom side of the outdoor unit before welding. Not removing Pallet(Wood Support) causes hazard of fire during welding.



6. Installation

6.2 Water Piping and water Circuit Connection

6.2.1 General considerations

- Followings are should be considered before beginning water circuit connection.
- Service space should be secured.
- Water pipes and connections should be cleaned using water.
- Space for installing external water pump should be provided if internal water pump capacity is not enough for installation field.
- · Never connect electric power while proceeding water charging.

6.2.2 Water piping and water circuit connection

1. Definition of terms are as follow :

- Water piping : Installing pipes where water is flowing inside the pipe.
- Water circuit connecting : Making connection between the unit and water pipes or between pipes and pipes. Connecting valves or elbows are, for example, in this category.
- 2. While installing water pipes, followings should be considered :
 - While inserting or putting water pipes, close the end of the pipe with pipe cap to avoid dust entering.
 - When cutting or welding the pipe, always be careful that inner section of the pipe should not be defective. For example, no weldments or no burrs are found inside the pipe.
 - Drain piping should be provided in case of water discharge by the operation of the safety valve. This situation can be happened when the internal pressure is over 3.0 bar and water inside the unit will be discharged to drain hose.

3. While connecting water pipes, followings should be considered :

- Pipe fittings (e.g. L-shape elbow, T-shape tee, diameter reducer, etc) should be tightened strongly to be free from water leakage.
- Connected sections should be leakage-proof treatment by applying teflon tape, rubber bushing, sealant solution, etc.
- Appropriate tools and tooling methods should be applied to prevent mechanical breakage of the connections.
- Operation time of flow control valve(e.g. 3way valve or 2way valve) should be less than 90 seconds.
- Drain hose should be connected with drain piping.

Water condensation on the floor

If underfloor cooling is performed, it is very important to keep leaving water temperature higher than 16 $^{\circ}$ C. Otherwise, dew condensation can occur on the floor. If floor is in humid environment, do not set leaving water temperature below 18 $^{\circ}$ C.

Water condensation on the radiator

While cooling operation, cold water may not flow to the radiator. If cold water enters to the radiator, dew generation on the surface of the radiator can be occurred. Use 2way-valve to block circuits from cooling operation.

Drainage


While cooling operation, condensed dew can drop down to the bottom of the unit. The condensing water must be sufficiently drained from the unit and dissipated frost-free.

7.1 Information

Turn off electric power supply before setting DIP switch

• Whenever adjusting DIP switch, turn off electric power supply to avoid electric shock.

Indoor PCB

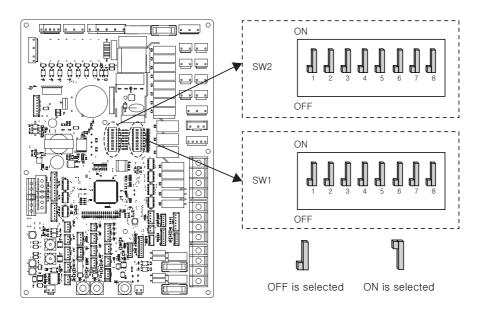

• Dip switch SW1

Description		Setting	Default
MODBUS Communication Type	1	As Master (LG extension modules)	, D
	1 1	As Slave (3rd party controller)	
MODBUS Function	2	REGINE	۰ آ
	2 ¶	Unified Open Protocol	2
ANTIFREEZE -	8	Antifreeze agent is not used	8
	8 🗍	Antifreeze agent in used*	

Note


*Possibility to allow colder water temperature by setting.

Bridge at CN_ANTI_SW on indoor PCB must be dis-connected to enable setting.


• Dip switch SW2

Description		Setting	Default	
Group control	1	As Master		
	1 们	As Slave	1	
Accessory installation information	2 3	Heat pump is installed (Heating(Cooling) circuit only)		
	2 3	Heat pump + DHW tank is installed	2	
		Heat pump + DHW tank + Solar thermal system is installed	з []	
	¶ ¶ 2 3	Unused		
Cycle	4	Heating Only	4	
	4 ¶	Heating & Cooling	4 d	
Room Air Sensor	5 📕	Room Air Sensor is not installed	5	
	5 ¶	Room Air Sensor is installed	24	
	1 6 7	Backup Heater is not used		
Selecting Backup Heater capacity	1 6 7	1Ø model : Half capacity is used 3Ø model : 1/3 capacity is used	6 📕	
	1 6 7	Unused	7 🖌	
	¶ ¶ 6 7	Full capacity is used		
Thermostat installation	8	Thermostat is NOT installed	_ n	
information	8 []	Thermostat is installed	8	

- Outdoor PCB
- UN36A Chassis

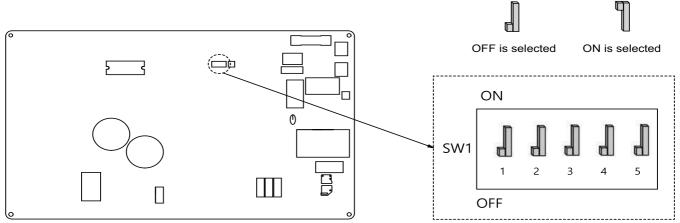

UN60A Chassis

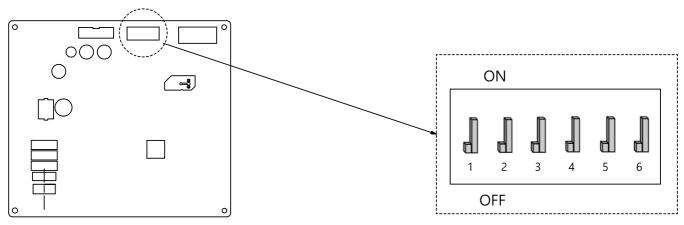

Dip switch Information

Description	Setting	Default
Low Noise Mode	Always Mode 2 : Maintain Low noise mode for target temperature	
	Partial Mode : Escape Low noise mode for target temperature	2
Peak Control	Max Mode	3
	Peak Control : To limit maximum current (Power saving)	

• Only Dip-switch no.2 and no.3 has a function. Others have no function.

When setting the Partial Mode, Mode can be exited to secure capacity after operating for a certain time.





Air Conditioner

20 Yeouido-dong, Yeongdeungpo-gu, Yeouido P.O.Box 335 Seoul, 150-721, Korea. http://www.lgeaircon.com

All rights reserved Printed in Korea August / 2021 The specifications, designs, and information in this brochure are subject to change without notice.

The air conditioners manufactured by LG have received ISO9001 certificate for quality assurance and ISO14001 certificate for environmental management system.